

# E-4

## Flexibility is paramount

Premium Industrial Warning Siren



- **100% Maintenance Free:** Nothing to lubricate, cool, nor maintain
- **32 Different Sounds:** Choose from these sounds to fine tune your signaling for the best results.
- **Compatibility:** This siren will integrate seamlessly with most existing siren and evacuation systems.
- **1 year Warranty:** rest assured your siren will be functional at all times and enjoy the confidence of free lifetime tech support and the best customer service in the industry.

For those looking for a powerful electronic siren in a compact package, Sentry Siren offers the E-4. This extra high output Siren, 113 db(A) (nominal), is highly effective where the ambient noise level is excessive. The Model E-4 features Thirty Two distinctive sounds, including ISO certified and country specific warning sounds. All sounds can be obtained from a two wire supply. The E-4 can be ordered to accept between 9 to 30 VDC, or 110 VAC-220 VAC. When versatility is a must, the E-4 is at home in a wide range of industrial, office, hotel and many other emergency signaling environments.

Siren is 3 5/8" Ht. x 3 5/8" Wd. x 2 7/8" dp. and made of ABS thermoplastic. It has two wire leads and a 1" NPT rigid conduit opening. Mounting hardware not included. Red in color.

Can be mounted using supplied base or with optional 4 X 4 Electrical Box and Blank. Sirens draw .015 amps @ 110 VAC, .008 amps @ 220 VAC, .06 amps @ 12 VDC, and .03 amps @ 24 VDC.

*Versatility and Power at the Right Price !!!*




**Also available:**

The E-4 can be ordered with an optional xenon strobe. Add visual warning to your audible warning at a fraction of the cost of a separate strobe light.

# Product Specifications

Voltage	9 - 30 VDC	110 VAC	220 VAC
Duty Cycle	Continuous		
Sound Output	113 dB (A) at 1m		
Sound Frequency	400-2900 Hz		
App. Range	800m in still air on open field		
Sound Selection	32 sounds - Dipswitch selectable with volume control		
Current Consumption	24 mA	30 mA	15 mA
IP Rating	IP 45 (IP 66 with deep base)		
Weight	270 g		
Dimensions	100 x 100 x 100 mm		

**Mounting** The unit should be mounted with the front facing in the direction the sound is required to travel. The Multitone comes with 32 user selectable tones incorporating low frequencies, high frequencies and all industry standard frequency patterns. The Multitone boasts leading acoustics, modern curves and low power consumption. The unit is also ideally suited for Fire & Security applications.

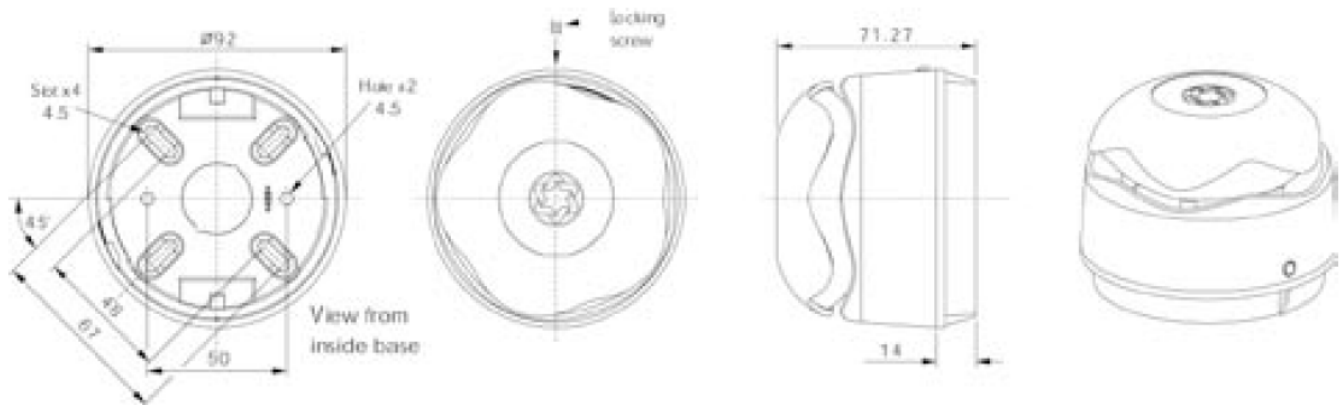

## Model E-4 - Tone Specifications

Sound #	Description	Sound #	Description
1.	Banshee LF Buzz	17	back up alarm HF
2.	Banshee Fast Sweep	18	Alternate HF
3	Banshee Slow Sweep	19	Slow Whoop
	Banshee Continuous	20	Din Tone
5	Banshee Fast Sweep (New)	21	French Fire Sound
	Medium Sweep	22	Australian Alert Signal
7	Continuous	23	Australian Evacuation Signal
8	back up alarm	24	US Temporal Tone
9	alternate	25	US Temporal Tone
10	medium sweep	26	Swedish Tone (Fire)
11	alternate	27	Swedish Tone (All Clear)
12	Bedlam Buzz	28	ISO 8201 LF
13	Bedlam Fast Sweep	29	ISO 8201 HF
14	Bedlam Slow Sweep	30	BT Banshee FP 1063.1
15	Bedlam Continuous	31	BT Banshee FP 1063.1
16	Banshee HF Fast Sweep	32	Bell Tone